


FIBER OPTIC PATCHCORD

Features

- Comply with : JIS C-5973, IEC Telecordia
- Low insertion loss and high return loss
- Design for Variable cable
- Customize assembly
- High stable mating and demating characteristic

Specification

Fiber type	Cable Type/Size
SM(9/125)MM(50/125,62.5/125)	Simplex,Duplex, 12C & 24C Breakout Cable (Indoor)
Insertion loss	GJA, GYDXTW, GYTA, GYTA53, GYTS GYXTW (Outdoor Cable)
≤0.2dB (against master connector)	0.9mm, 2.4mm 3.0mm
SPC ≥40dB	Operation Temperature stability
UPC ≥55dB	≤0.3dB (-40°C~ 85°C)
APC ≥65dB	
Mating Durability	
≤0.2dB (500 times)	

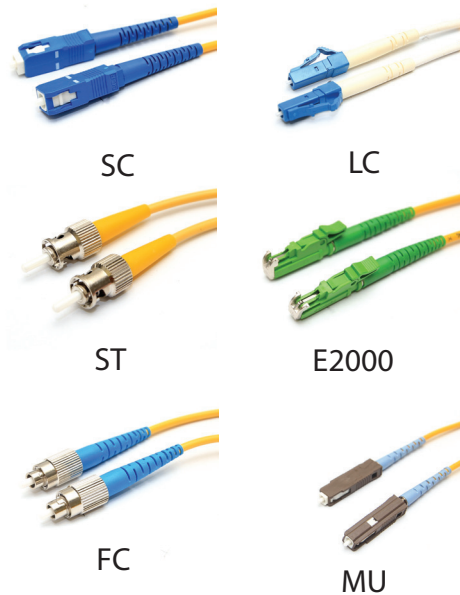


Available type of patchcore


Ordering Infomation

to order the HADAKO product, follow the sequence part number

PATCHCORD INDOOR

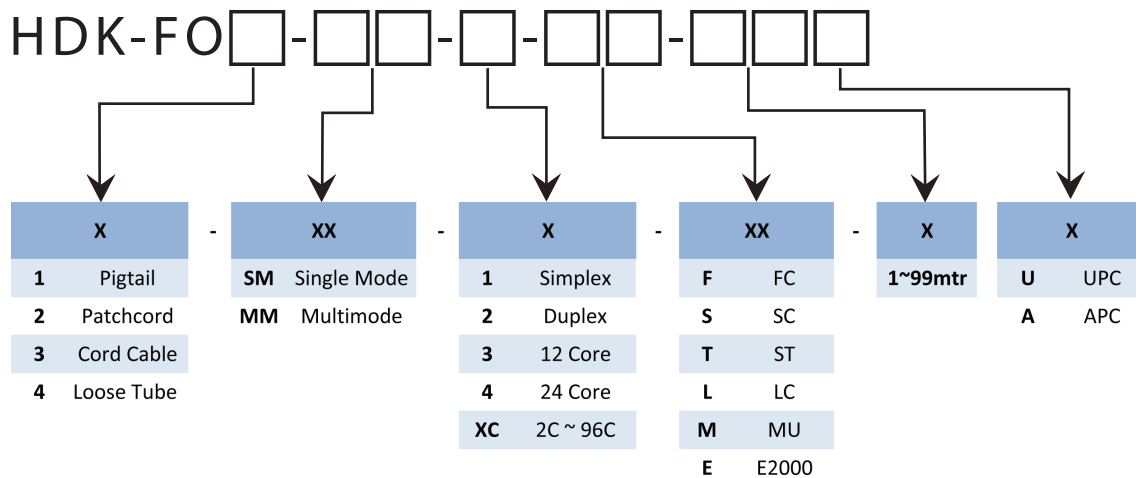

PATCHCORD OUTDOOR

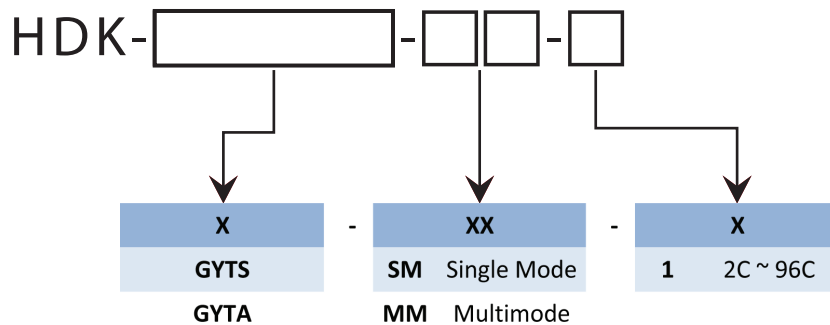

*other cable and lenght are available by request