


OPTICAL DISTRIBUTION FRAME 48 & 96 CORE



PATCHING

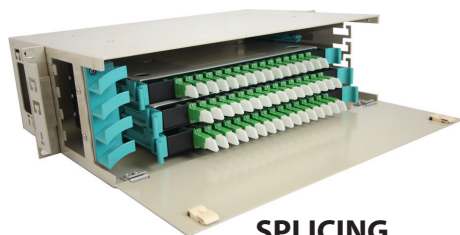

SPLICING

Available in 2 type
**Patching
Splicing**

Dimension (L x W x H):

48 CORE

430.0 x 295.0 x 130.0 mm (w/o bracket)

480.0 x 295.0 x 130.0 mm (c/w bracket)

96CORE

430.0 x 295.0 x 260.0 mm (w/o bracket)

480.0 x 295.0 x 260.0 mm (c/w bracket)

Material

Cold rolled mild steel sheet, 1.2mm thickness

Finishing

Anti-rust treatment followed by Epoxy Powder coated

ORDERING INFORMATION

48 CORE

ODF SPLICING PANEL
ODF PATCHING PANEL


HDK-ODF48SP-004
HDK-ODF48PP-005

96 CORE

ODF SPLICING PANEL

HDK-ODF96SP-004

SPLICING TRAY ODF

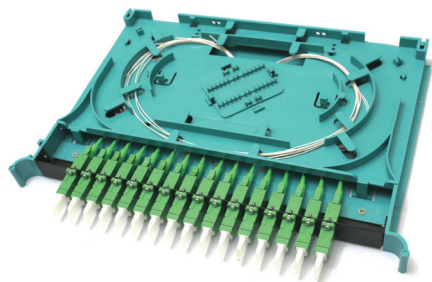

ODF

Splicing Tray 12/16 Ports

Dimension (L x W x H)


330 x 220 x 25 mm

ORDERING INFORMATION

SPLICING TRAY ODF

HDK-SPL-001

ODF Picture with E2000 adapter

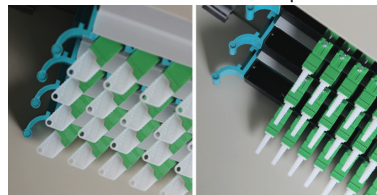

12CORE

16CORE

Splicing tray variation can be customize with your need of different type and numbers of adapter. Please refer to previous fiber adapter List page